



RECORD BOLT CLIPPERS



9 types 7 sizes

RECORD CHAIN PIPE VICES


Range of sizes for Pipes from $\frac{1}{8}$ " to 8"




RECORD HINGED PIPE VICES

Range of sizes for Pipes from $\frac{1}{8}$ " to 12"


also available with long jaws which are reversible



RECORD PIPE VICES On TRIPOD STANDS



RECORD LEADER PIPE WRENCHES




Range of sizes 8" to 60"

RECORD STILLSON PIPE WRENCHES

Range of sizes 8" to 48"



RECORD CHAIN PIPE WRENCHES




Range of sizes for Pipes from $\frac{1}{8}$ " to 18"


also Leader HEAVY DUTY PIPE TONGS

RECORD PIPE CUTTERS

3 Wheel Type
8 sizes

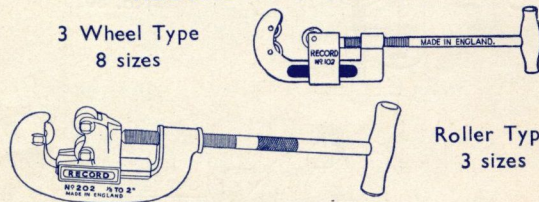

Roller Type
3 sizes



Link Type

Range of sizes for Pipes $\frac{1}{2}$ " to 24"

Have
you
read

PLANECAST


by
C. W. HAMPTON
and E. CLIFFORD

Only 3/6 each
(postage extra)

RECORD TOOLS CATALOGUE
free on request




RECORD TOOLS

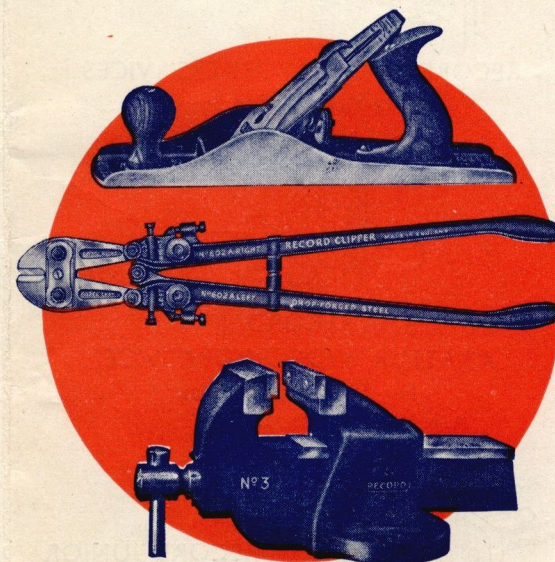

FOR SERVICE AND SATISFACTION


Made in England by
C. & J. HAMPTON, Limited, SHEFFIELD
Stocked by all good class Tool Dealers

RECORD MULTI - PLANE No. 405



With 23 Standard
Cutters (Tungsten
Steel)

For Ploughing, Dadoing, Beading, Centre Beading,
Rabbeting and Filletstering, Match Planing, Sash
Planing and Slitting





RECORD CIRCULAR PLANE No. 020




RECORD BULL - NOSE RABBIT PLANE No. 075

RECORD
BULL - NOSE
PLANES
Made in 2 patterns

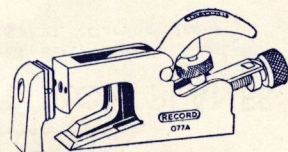


RECORD DUPLEX RABBIT AND FILLETSTER PLANE No. 078

RECORD PLOUGH PLANE No. 043 with 3 Cutters





RECORD PLOUGH PLANE No. 044 with 8 Cutters


RECORD COMBINATION PLANE No. 050 with 17 Tungsten Steel Cutters

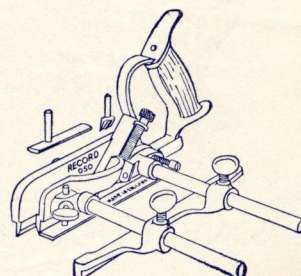


RECORD "3 in 1" PLANE Shoulder Rabbet, Bull-Nose and Chisel Plane No. 311

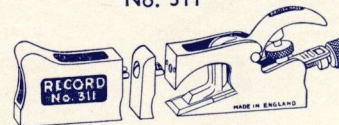


RECORD SIDE RABBIT PLANE No. 2506

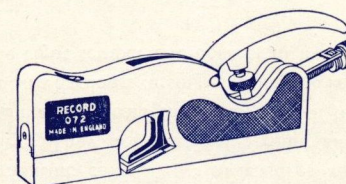

RECORD SHOULDER RABBIT PLANES 2 patterns 5 sizes

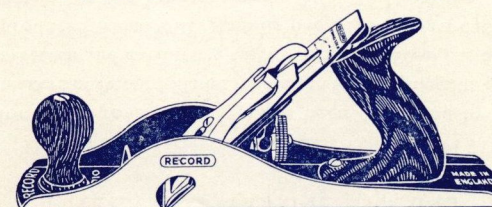


RECORD BENCH RABBIT PLANES 2 sizes



RECORD ROUTER PLANE No. 722

RECORD ROUTER PLANE No. 071




RECORD BLOCK PLANES Made in 6 patterns

RECORD SPOKE SHAVES 5 patterns 10 sizes




RECORD CABINET SCRAPER No. 080


RECORD BOX SCRAPER No. 070

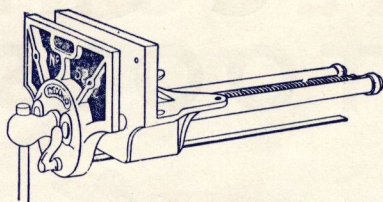


RECORD WOODWORKERS' VICES Quick Grip or Plain Screw. 7", 9" and 10½" width of jaws




RECORD AMATEUR WOODWORK VICE No. 50—6" width of Jaw Also No. 55—6½" " "

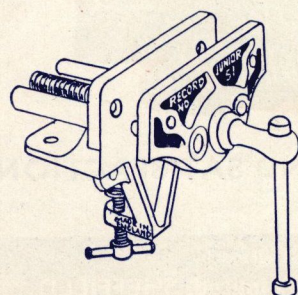

RECORD JUNIOR WOODWORK VICE No. 51 6" width of jaws


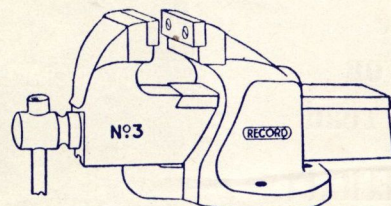


RECORD MECHANICS' VICES Plain Screw type 10 sizes ranging from 2¼" to 8" width of jaws Can be supplied with Swivel Base if required

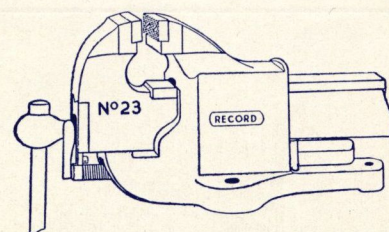


RECORD FITTERS' VICES Quick-Grip type 5 sizes ranging from 3¼" to 6" width of jaws Can be supplied with Swivel Base if required

RECORD AUTO VICE No. 74

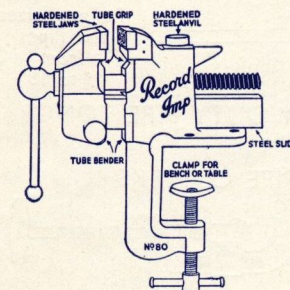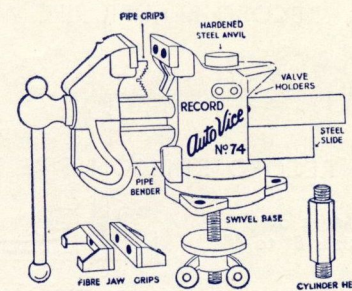

RECORD IMP VICE No. 80

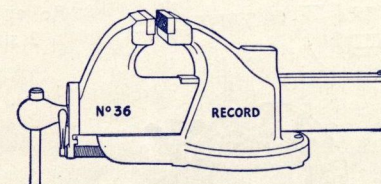

RECORD ENGINEERS' VICES Quick-Grip or Plain Screw 3 Types Range of sizes 4½" to 8" width of Jaws

RECORD FIBRE GRIPS FOR VICES


Range of sizes to suit Vices 2¼" to 6"
width of Jaws



RECORD STEEL BENCH SCREWS Fig. 165 4 Sizes

RECORD SHEET METAL CUTTER No. 500

Capacity up to
16 gauge
(approx. 1/16")

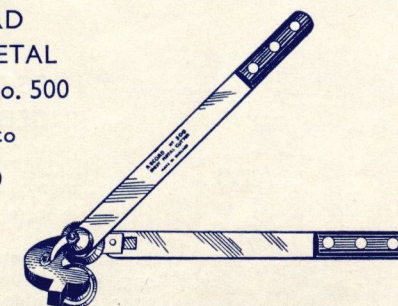


AT YOUR SERVICE!

SPARE PARTS are available for all
RECORD TOOLS. Please order
through your usual Tool Dealer.

RECORD ADJUSTABLE IRON PLANES

With Warranted Best Crucible Cast
TUNGSTEN STEEL Cutting Irons

End and Side Adjustment of Cutters
Handles and Knobs of Selected Hardwood
Lever Cap and Small Screws, Nickel-plated

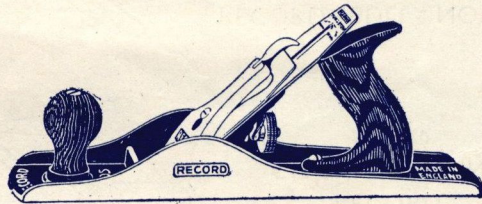


Plane No.	Type	Length Inches	Width of Cutter Inches	Weight Pounds
03	Smooth	8	1½	3½
04	Smooth	9	2	3½
04½	Smooth	10	2½	5
05	Jack	14	2	5
05½	Jack	15	2½	6
06	Fore	18	2½	7
07	Jointer	22	2½	8
08	Jointer	24	2½	9
T5	Technical Jack	13	2	5

These Planes are also made with Corrugated Bases


RECORD ADJUSTABLE IRON PLANES

Fitted with STAY-SET CAP IRON

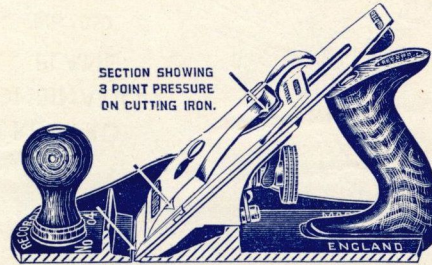

The Record STAY-SET Cap Iron is an important improvement to Adjustable Iron Planes, the advantages being as follows:

1. The Cutter can be honed or sharpened without unscrewing or removing the Cap Iron. The Deflector is simply lifted clear of the Cutting Iron to allow it to be sharpened, and when replaced the same setting is maintained without any adjustment. The Cutting Iron can be honed many times before it is necessary to reset the Cap Iron.
2. The application of the pressure at three points on the Cutting Iron adds greatly to the rigidity of the Plane, and eliminates all possibility of chatter.
3. The STAY-SET Cap Iron is greater in thickness and is in close contact with the Cutting Iron for the whole of its length, which greatly increases the solidity and firmness of the entire cutting unit.
4. The extra thickness of the Cap Iron also provides for a longer threaded hole for the cap screw.

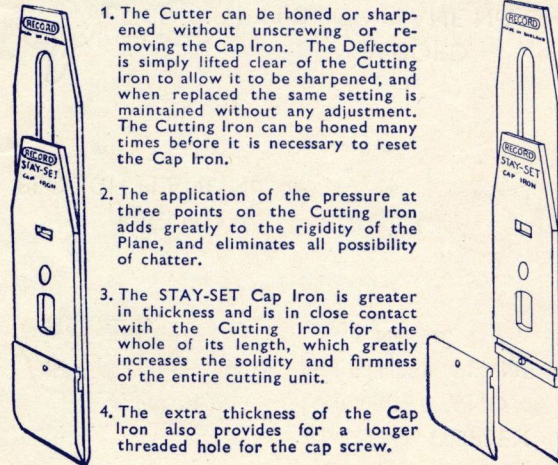

RECORD PLANE IRONS

The use of a Special Crucible Cast TUNGSTEN STEEL for Plane Irons or Cutters has been developed by the makers of Record Planes, and as a result of metallurgical research and exhaustive tests a quality of Steel has been produced which will retain its fine edge and fast cutting quality on the hardest woods.

Record Plane Irons are hardened and tempered under scientific control, which ensures accuracy and uniformity. They are precision-ground all over, and every iron which bears the Record mark has passed a final test on a hardness testing machine and is guaranteed to be the right temper and correct in every way.



Single Iron




Double Iron




Cutter complete with STAY-SET Cap Iron and Screw

The RECORD PLANES listed on opposite page are available with STAY-SET CAP IRONS. When required, specify "SS" after the Plane No. viz., 04—SS.



RECORD SASH CRAMPS
2 sections of bar. Full range of sizes



RECORD T-BAR CRAMPS
2 sections of bar. Full range of sizes

RECORD
RIBBED G CRAMPS





Fig. 120—Malleable Iron Frame
For Light Service, 8 sizes, 2" to 12"

Fig. 121—Drop-Forged Steel Frame
For Heavy-duty Service, 7 sizes, 2" to 12"



RECORD
FLOORING CRAMP
No. 153.